



# HIMOINSA

# HYW-17 T5 S5

INDUSTRIAL RANGE  
Powered by YANMAR



SERVICE		PRP	ESP
POWER	kVA	17,5	19,2
POWER	kW	14	15,4
RATED SPEED	r.p.m.	1.500	
STANDARD VOLTAGE	V	400/230	
AVAILABLE VOLTAGES	V	230 - 230/132	



## INDUSTRIAL RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2002/88/EC & 2004/26/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

G2 class load acceptance in accordance with ISO 8528-5:2013

**HIMOINSA HEADQUARTERS:**

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain  
Tel:+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |  
info@himoinsa.com | www.himoinsa.com

**Manufacture facilities:**

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

**Subsidiaries:**

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |  
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA



## STANDARD SOUNDPROOFING



B10



WATER-COOLED



THREE PHASE



50 HZ



STAGE V



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.



Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28  
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail:info@himoinsa.com | www.himoinsa.com





## Engine Specifications | 1.500 r.p.m.

Rated Output (PRP)	kW	17,2
Rated Output (ESP)	kW	18,5
Manufacturer	YANMAR	
Model	4TNV88BIHR	
Engine Type	4-stroke diesel	
Injection Type	Direct	
Aspiration Type	Natural	
Number of cylinders and arrangement	4-L	
Bore and Stroke	mm	88 x 90
Displacement	L	2,19
Cooling System	Coolant	
Lube Oil Specifications	SAE 3 class 10W30 / API grade CD,CF	
Compression Ratio	20	

Fuel Consumption ESP	l/h	5,3
Fuel Consumption 100% PRP	l/h	4,7
Fuel Consumption 75 % PRP	l/h	3,7
Fuel Consumption 50 % PRP	l/h	2,3
Lube oil consumption with full load	g/kWh	0,27
Total oil capacity	L	7,4
Total coolant capacity	L	5,5
Governor	Type	Mechanical
Air Filter	Type	Dry



- Diesel engine
- 4-stroke cycle
- Water-cooled
- 12V electrical system
- Water separator filter (visible level)
- Dry air filter
- Radiator with pusher fan
- Mechanical governor
- Hot parts protection
- Moving parts protection



## Generator Specifications | MECC ALTE

Manufacturer	MECC ALTE	
Poles	No.	4
Connection type (standard)	Star-series	
Mounting type	S-4 7,5"	
Insulation	Class	H class
Enclosure (according IEC-34-5)	IP23	

Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)




- Self-excited and self-regulated
- AVR governor
- IP23 protection
- H class insulation





## WEIGHT AND DIMENSIONS

		Standard Version	High Capacity version	High Capacity version
Length (L)	mm	2.100	2.100	2.100
Height (H)	mm	1.350	1.410	1.565
Width (W)	mm	975	975	975
Maximum shipping volume	m <sup>3</sup>	2,76	2,89	3,2
Weight with liquids in radiator and sump	Kg	765	846	903
Fuel tank capacity	L	100	190	330
Autonomy	Hours	27	51	89
Sound pressure level	dB(A)@7m	62 ± 2,4	62 ± 2,4	62 ± 2,4
		Plastic tank	Steel tank	Steel tank

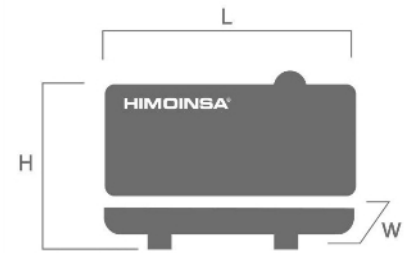

## APPLICATION DATA

### EXHAUST SYSTEM

Maximum exhaust temperature	°C	480
Maximum allowed back pressure	mm H2o	1300
Exhaust Flange Size (external diameter)	mm	65

### NECESSARY AMOUNT OF AIR

Intake air flow	m <sup>3</sup> /h	88,7
Cooling Air Flow	m <sup>3</sup> /s	0,8
Alternator fan air flow	m <sup>3</sup> /s	0,11

### STARTING SYSTEM

Starting power	KW	1,4
Starting power	CV	1,9
Auxiliary Voltage	Vdc	12

### FUEL SYSTEM

Fuel Oil Specifications		Diesel
Fuel Tank	L	100
Other fuel tank capacities	L	190, 330



## Soundproofed version

- Steel chassis
- Anti-vibration shock absorbers
- Chassis with integrated fuel tank
- Fuel level gauge
- External emergency stop switch
- Bodywork made from high quality steel plate
- High mechanical strength
- Low noise emissions level
- Soundproofing provided by high-density volcanic rock wool
- Epoxy polyester powder coating
- Full access for maintenance (water, oil and filters, no need to remove the canopy)
- Reinforced lifting hooks for crane hoisting
- Watertight chassis (acts as a double barrier against liquid retention)
- Fuel tank drain plug
- Chassis drain plug
- Chassis ready for future mobile kit installation
- Steel residential silencer -35db(A) attenuation.
- Oil sump extraction kit
- Versatility to assemble a high capacity chassis with a metallic fuel tank
- IP Protection according to ISO 8528-13:2016
- Fuel transfer pump (Opcional).



## FEATURES OF THE CONTROL UNITS

	M6	CEM 7	CEA 7	CEC 7	CEM7 + CEC7
<b>Generator Readings</b>	Voltage between phases	•	•	•	•
	Voltage between neutral and phase	•	•	•	•
	Current intensities	•	•	•	•
	Frequency	•	•	•	•
	Apparent power (Kva)	•	•	•	•
	Active power (Kw)	•	•	•	•
	Reactive power (kVAr)	•	•	•	•
	Power factor	•	•	•	•
<b>Mains Readings</b>	Voltage between phases		•	•	•
	Voltage between phases and neutral		•	•	•
	Current intensities		•	•	•
	Frequency		•	•	•
	Apparent power		•		
	Active power		•		
	Reactive power		•		
<b>Engine Readings</b>	Coolant temperature		•		•
	Oil pressure		•		•
	Fuel level (%)		•		•
	Battery voltage		•		•
	R.P.M.		•		•
	Battery charge alternator voltage		•		•
<b>Engine Protections</b>	High water temperature		•		•
	High water temperature by sensor		•		•
	Low water temperature by sensor		•		•
	Low oil pressure		•		•
	Low oil pressure by sensor		•		•
	Low water level		•		•
	Unexpected shutdown	•	•		•
	Fuel storage		•		•
	Fuel storage by sensor		•		•
	Stop failure		•		•
	Battery voltage failure		•		•
	Battery charge alternator failure		•		•
	Overspeed		•		•
	Underspeed		•		•
	Start failure	•	•		•
	Emergency stop	•	•		•

• Standard

⊙ Optional



	M6	CEM 7	CEA 7	CEC 7	CEM7 + CEC7
<b>Alternator Protections</b>	High frequency	•	•	•	•
	Low frequency	•	•	•	•
	High voltage	•	•	•	•
	Low voltage	•	•	•	•
	Short-circuit	•	•		•
	Asymmetry between phases	•	•	•	•
	Incorrect phase sequence	•	•	•	•
	Inverse power	•	•		•
	Overload	•	•		•
	Genset signal drop	•	•	•	•
<b>Counters</b>	Total hour counter	•	•	•	•
	Partial hour counter	•	•	•	•
	Kilowatt meter	•	•	•	•
	Starts valid counters	•	•	•	•
	Starts failure counters	•	•	•	•
	Maintenance	•	•	•	•
<b>Communications</b>	RS232	⓪	⓪	⓪	⓪
	RS485	⓪	⓪	⓪	⓪
	Modbus IP	⓪	⓪	⓪	⓪
	Modbus	⓪	⓪	⓪	⓪
	CCLAN	⓪	⓪		⓪
	Software for PC	⓪	⓪	⓪	⓪
	Analogue modem	⓪	⓪	⓪	⓪
	GSM/GPRS modem	⓪	⓪	⓪	⓪
	Remote screen	⓪	⓪		⓪
	Tele signal	⓪ (8 + 4)	⓪ (8 + 4)		⓪ (8 + 4)
J1939	⓪	⓪		⓪	
<b>Features</b>	Alarm history	•	•	•	•
	External start	•	•	•	•
	Start inhibition	•	•	•	•
	Mains failure start		•	•	•
	Start under normative EJP		•	•	•
	Pre-heating engine control	•	•	•	•
	Genset contactor activation	•	•	•	•
	Mains & Genset contactor activation		•	•	•
	Fuel transfer control		•	•	•
	Engine temperature control		•	•	•
	Manual override		•	•	•
	Programmable alarms		•	•	•
	Genset start function in test mode		•	•	•
	Programmable outputs		•	•	•
	Multilingual		•	•	•
	<b>Special Functions</b>	GPS Positioning	⓪	⓪	
Synchronisation		⓪	⓪		⓪
Mains synchronization		⓪	⓪		⓪
Second Zero elimination		⓪	⓪		⓪
RAM7		⓪	⓪		⓪
Remote screen		⓪	⓪		⓪
Programming timer		⓪	⓪		⓪

• Standard      ⓪ Optional





## CONTROL PANELS



### M6

Manual volt-free contact start panel and thermal magnetic protection (depending on current and voltage) and differential.

Control unit M6



### M5

Digital manual Auto-Start control panel and thermal magnetic protection (depending on current and voltage) and differential with CEM7.

Digital control unit CEM7



### AS5

Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM7 unit. (\*) AS5 as optional with CEA7 unit. Automatic panel without transfer switch and WITH mains control.



### CC2

Himoinsa Switching cabinet WITH display.


Digital control unit CEC7



### AS5 + CC2

Automatic panel WITH transfer switch and with mains control. The display will be on the genset and on the cabinet.

Digital control unit CEM7+CEC7



### AC5

Automatic mains failure control panel. Wall-mounted cabinet WITH transfer switch and thermal magnetic protection (depending on current and voltage).

Digital control unit CEA7



## Electrical system

- M5 control panel with electronic CEM7 control unit and switched emergency stop
- Power panel with built-in circuit breaker plates
- Safety relay in output terminal board (thermal magnetic trip and alarm in control unit)
- Adjustable earth leakage protection (time & sensitivity) standard in M5 and AS5, with thermal magnetic protection
- Battery charger alternator with ground connection
- Starter battery/ies installed (cables and bracket included)
- Ground connection electrical installation with connection ready for ground spike (not supplied)
- Battery Switch (Opcional).