



# HIMOINSA

# HSW-305 T5

INDUSTRIAL RANGE  
Powered by **SCANIA**



| SERVICE            |        | PRP           | ESP |
|--------------------|--------|---------------|-----|
| POWER              | kVA    | 300           | 330 |
| POWER              | kW     | 240           | 264 |
| RATED SPEED        | r.p.m. | 1.500         |     |
| STANDARD VOLTAGE   | V      | 400/230       |     |
| AVAILABLE VOLTAGES | V      | 230 - 230/132 |     |



## INDUSTRIAL RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

G2 class load acceptance in accordance with ISO 8528-5:2013

### HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain  
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |  
info@himoinsa.com | www.himoinsa.com

### Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

### Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |  
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA



## STANDARD SOUNDPROOFING



F1



WATER-COOLED



THREE PHASE



50 HZ



NON COMPLYING 97/68/EC



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.





## Engine Specifications | 1.500 r.p.m.

|                                     |                               |           |
|-------------------------------------|-------------------------------|-----------|
| Rated Output (PRP)                  | kW                            | 261       |
| Rated Output (ESP)                  | kW                            | 288       |
| Manufacturer                        | SCANIA                        |           |
| Model                               | DC9-72A(02-13)                |           |
| Engine Type                         | 4-stroke diesel               |           |
| Injection Type                      | Direct                        |           |
| Aspiration Type                     | Turbocharged and after-cooled |           |
| Number of cylinders and arrangement | 5-L                           |           |
| Bore and Stroke                     | mm                            | 130 x 140 |
| Displacement                        | L                             | 9,3       |
| Cooling System                      | Coolant                       |           |
| Lube Oil Specifications             | ACEA E3,E4,E5 or E7           |           |
| Compression Ratio                   | 16:1                          |           |

|                                     |       |            |
|-------------------------------------|-------|------------|
| Fuel Consumption ESP                | l/h   | 67,35      |
| Fuel Consumption 100% PRP           | l/h   | 60,23      |
| Fuel Consumption 75 % PRP           | l/h   | 43,78      |
| Fuel Consumption 50 % PRP           | l/h   | 29,8       |
| Lube oil consumption with full load | g/kWh | 0,2        |
| Total oil capacity                  | L     | 38         |
| Total coolant capacity              | L     | 38         |
| Governor                            | Type  | Electrical |
| Air Filter                          | Type  | Dry        |
| Inner diameter exhaust pipe         | mm    | 90         |



- Diesel engine
- 4-stroke cycle
- Water-cooled
- 24V electrical system
- Water separator filter (visible level)
- Dry air filter
- Radiator with pusher fan
- HTW sender
- LOP sender
- Radiator water level sensor
- Electronic governor
- Hot parts protection
- Moving parts protection



## Generator Specifications | STAMFORD

|                                |             |         |
|--------------------------------|-------------|---------|
| Manufacturer                   | STAMFORD    |         |
| Poles                          | No.         | 4       |
| Connection type (standard)     | Star-series |         |
| Mounting type                  | S-1 14"     |         |
| Insulation                     | Class       | H class |
| Enclosure (according IEC-34-5) | IP23        |         |

|                   |                                |
|-------------------|--------------------------------|
| Exciter system    | Self-excited, brushless        |
| Voltage regulator | A.V.R. (Electronic)            |
| Bracket type      | Single bearing                 |
| Coupling system   | Flexible disc                  |
| Coating type      | Standard (Vacuum impregnation) |




- Self-excited and self-regulated
- IP23 protection
- H class insulation



## WEIGHT AND DIMENSIONS

|  |                | Standard Version | High Capacity version |
|--|----------------|------------------|-----------------------|
| Length (L)                               | mm             | 3.800            | 3.800                 |
| Height (H)                               | mm             | 2.253            | 2.615                 |
| Width (W)                                | mm             | 1.400            | 1.400                 |
| Maximum shipping volume                  | m <sup>3</sup> | 11,99            | 13,91                 |
| Weight with liquids in radiator and sump | Kg             | 3647             | 4149                  |
| Fuel tank capacity                       | L              | 449              | 999                   |
| Autonomy                                 | Hours          | 10               | 23                    |
| Sound pressure level                     | dB(A)@7m       | 68 ± 2,4         | 68 ± 2,4              |
|  |                | Steel tank       | Steel tank            |

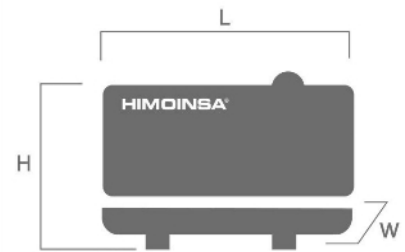

## APPLICATION DATA

### EXHAUST SYSTEM

|   |          |        |
|---|----------|--------|
| Maximum exhaust temperature             | °C       | 506    |
| Exhaust Gas Flow                        | kg/s     | 0,4    |
| Exhaust Flange Size (external diameter) | mm       | 140    |
| Heat dissipated by exhaust pipe         | KCal/Kwh | 626,43 |

### NECESSARY AMOUNT OF AIR

|                         |                   |        |
|-------------------------|-------------------|--------|
| Intake air flow         | m <sup>3</sup> /h | 1165,5 |
| Cooling Air Flow        | m <sup>3</sup> /s | 8,7    |
| Alternator fan air flow | m <sup>3</sup> /s | 0,8    |

### STARTING SYSTEM

|                   |     |      |
|-------------------|-----|------|
| Starting power    | kW  | 5,5  |
| Starting power    | CV  | 7,48 |
| Auxiliary Voltage | Vdc | 24   |

### FUEL SYSTEM

|                            |   |        |
|----------------------------|---|--------|
| Fuel Oil Specifications    |   | Diesel |
| Fuel Tank                  | L | 449    |
| Other fuel tank capacities | L | 999    |



## Soundproofed version

- Steel chassis
- Anti-vibration shock absorbers
- Chassis with integrated fuel tank
- Fuel level gauge
- External emergency stop switch
- Bodywork made from high quality steel plate
- High mechanical strength
- Low noise emissions level
- Soundproofing provided by high-density volcanic rock wool
- Epoxy polyester powder coating
- Full access for maintenance (water, oil and filters, no need to remove the canopy)
- Reinforced lifting hooks for crane hoisting
- Watertight chassis (acts as a double barrier against liquid retention)
- Fuel tank drain plug
- Chassis drain plug
- Chassis ready for future mobile kit installation
- Steel residential silencer -35db(A) attenuation.
- Oil sump extraction kit
- Versatility to assemble a high capacity chassis with a metallic fuel tank
- IP Protection according to ISO 8528-13:2016
- 3 way valve for external fuel supply (available in 1/2" and 3/8" fittings) (Optional).
- Fuel transfer pump (Optional).





## FEATURES OF THE CONTROL UNITS

|                           | CEM 7                              | CEA 7 | CEC 7 | CEM7 + CEC7 |
|---------------------------|------------------------------------|-------|-------|-------------|
| <b>Generator Readings</b> | Voltage between phases             | •     | •     | •           |
|                           | Voltage between neutral and phase  | •     | •     | •           |
|                           | Current intensities                | •     | •     | •           |
|                           | Frequency                          | •     | •     | •           |
|                           | Apparent power (Kva)               | •     | •     | •           |
|                           | Active power (Kw)                  | •     | •     | •           |
|                           | Reactive power (kVAr)              | •     | •     | •           |
|                           | Power factor                       | •     | •     | •           |
| <b>Mains Readings</b>     | Voltage between phases             |       | •     | •           |
|                           | Voltage between phases and neutral |       | •     | •           |
|                           | Current intensities                |       | •     | •           |
|                           | Frequency                          |       | •     | •           |
|                           | Apparent power                     |       | •     |             |
|                           | Active power                       |       | •     |             |
|                           | Reactive power                     |       | •     |             |
| <b>Engine Readings</b>    | Coolant temperature                | •     |       | •           |
|                           | Oil pressure                       | •     | •     | •           |
|                           | Fuel level (%)                     | •     | •     | •           |
|                           | Battery voltage                    | •     | •     | •           |
|                           | R.P.M.                             | •     | •     | •           |
|                           | Battery charge alternator voltage  | •     | •     | •           |
| <b>Engine Protections</b> | High water temperature             | •     | •     | •           |
|                           | High water temperature by sensor   | •     | •     | •           |
|                           | Low water temperature by sensor    | •     | •     | •           |
|                           | Low oil pressure                   | •     | •     | •           |
|                           | Low oil pressure by sensor         | •     | •     | •           |
|                           | Low water level                    | •     | •     | •           |
|                           | Unexpected shutdown                | •     | •     | •           |
|                           | Fuel storage                       | •     | •     | •           |
|                           | Fuel storage by sensor             | •     | •     | •           |
|                           | Stop failure                       | •     | •     | •           |
|                           | Battery voltage failure            | •     | •     | •           |
|                           | Battery charge alternator failure  | •     | •     | •           |
|                           | Overspeed                          | •     | •     | •           |
|                           | Underspeed                         | •     | •     | •           |
| Start failure             | •                                  | •     | •     |             |
| Emergency stop            | •                                  | •     | •     |             |

• Standard

⊙ Optional



|                               | CEM 7                               | CEA 7              | CEC 7              | CEM7 + CEC7        |
|-------------------------------|-------------------------------------|--------------------|--------------------|--------------------|
| <b>Alternator Protections</b> | High frequency                      | ●                  | ●                  | ●                  |
|                               | Low frequency                       | ●                  | ●                  | ●                  |
|                               | High voltage                        | ●                  | ●                  | ●                  |
|                               | Low voltage                         | ●                  | ●                  | ●                  |
|                               | Short-circuit                       | ●                  | ●                  | ●                  |
|                               | Asymmetry between phases            | ●                  | ●                  | ●                  |
|                               | Incorrect phase sequence            | ●                  | ●                  | ●                  |
|                               | Inverse power                       | ●                  | ●                  | ●                  |
|                               | Overload                            | ●                  | ●                  | ●                  |
|                               | Genset signal drop                  | ●                  | ●                  | ●                  |
| <b>Counters</b>               | Total hour counter                  | ●                  | ●                  | ●                  |
|                               | Partial hour counter                | ●                  | ●                  | ●                  |
|                               | Kilowatt meter                      | ●                  | ●                  | ●                  |
|                               | Starts valid counters               | ●                  | ●                  | ●                  |
|                               | Starts failure counters             | ●                  | ●                  | ●                  |
| Maintenance                   | ●                                   | ●                  | ●                  |                    |
| <b>Communications</b>         | RS232                               | ⓪                  | ⓪                  | ⓪                  |
|                               | RS485                               | ⓪                  | ⓪                  | ⓪                  |
|                               | Modbus IP                           | ⓪                  | ⓪                  | ⓪                  |
|                               | Modbus                              | ⓪                  | ⓪                  | ⓪                  |
|                               | CCLAN                               | ⓪                  | ⓪                  | ⓪                  |
|                               | Software for PC                     | ⓪                  | ⓪                  | ⓪                  |
|                               | Analogue modem                      | ⓪                  | ⓪                  | ⓪                  |
|                               | GSM/GPRS modem                      | ⓪                  | ⓪                  | ⓪                  |
|                               | Remote screen                       | ⓪                  | ⓪                  | ⓪                  |
|                               | Tele signal                         | ⓪ (8 + 4)          | ⓪ (8 + 4)          | ⓪ (8 + 4)          |
| J1939                         | ⓪                                   | ⓪                  | ⓪                  |                    |
| <b>Features</b>               | Alarm history                       | ●                  | ●                  | ●                  |
|                               | External start                      | (10) / (opc. +100) | (10) / (opc. +100) | (10) / (opc. +100) |
|                               | Start inhibition                    | ●                  | ●                  | ●                  |
|                               | Mains failure start                 | ●                  | ●                  | ●                  |
|                               | Start under normative EJP           | ●                  | ●                  | ●                  |
|                               | Pre-heating engine control          | ●                  | ●                  | ●                  |
|                               | Genset contactor activation         | ●                  | ●                  | ●                  |
|                               | Mains & Genset contactor activation | ●                  | ●                  | ●                  |
|                               | Fuel transfer control               | ●                  | ●                  | ●                  |
|                               | Engine temperature control          | ●                  | ●                  | ●                  |
|                               | Manual override                     | ●                  | ●                  | ●                  |
|                               | Programmable alarms                 | ●                  | ●                  | ●                  |
|                               | Genset start function in test mode  | ●                  | ●                  | ●                  |
|                               | Programmable outputs                | ●                  | ●                  | ●                  |
|                               | Multilingual                        | ●                  | ●                  | ●                  |
| <b>Special Functions</b>      | GPS Positioning                     | ⓪                  | ⓪                  | ⓪                  |
|                               | Synchronisation                     | ⓪                  | ⓪                  | ⓪                  |
|                               | Mains synchronization               | ⓪                  | ⓪                  | ⓪                  |
|                               | Second Zero elimination             | ⓪                  | ⓪                  | ⓪                  |
|                               | RAM7                                | ⓪                  | ⓪                  | ⓪                  |
|                               | Remote screen                       | ⓪                  | ⓪                  | ⓪                  |
|                               | Programming timer                   | ⓪                  | ⓪                  | ⓪                  |

● Standard

⓪ Optional





## CONTROL PANELS



### M5


Digital manual Auto-Start control panel and thermal magnetic protection (depending on current and voltage) and differential with CEM7.

Digital control unit CEM7



### AS5


Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM7 unit. (\*) AS5 as optional with CEA7 unit. Automatic panel without transfer switch and WITH mains control.

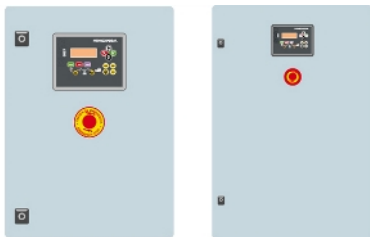

### CC2

Himoinsa Switching cabinet WITH display.


Digital control unit CEC7



### AS5 + CC2

Automatic panel WITH transfer switch and with mains control. The display will be on the genset and on the cabinet.

Digital control unit CEM7+CEC7

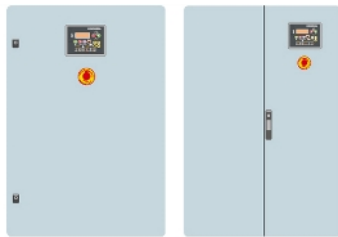

### AC5

Automatic mains failure control panel. Wall-mounted cabinet WITH transfer switch and thermal magnetic protection (depending on current and voltage).

Digital control unit CEA7



## Electrical system

- Electric control and power panel with measurements devices and control unit (according to necessity and configuration)
- 4-pole thermal magnetic circuit breaker
- Battery Switch
- Adjustable earth leakage protection (time & sensitivity) standard in M5 and AS5, with thermal magnetic protection
- Battery charger (standard on gensets with automatic control panels)
- Heating resistor (standard on sets with automatic control panels)
- Battery charger alternator with ground connection
- Starter battery/ies installed (cables and bracket included)
- Ground connection electrical installation with connection ready for ground spike (not supplied)

