




HIMOINSA

HTW-1745 T5

HEAVY RANGE
Powered by MITSUBISHI

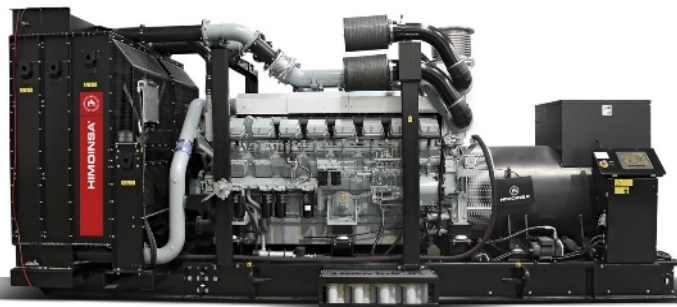

SERVICE		PRP / DCP	ESP
POWER	kVA	1736	1900
POWER	kW	1389	1520
RATED SPEED	r.p.m.	1.500	
STANDARD VOLTAGE	V	400/230	
AVAILABLE VOLTAGES	V	380/220 - 415/240	



HEAVY RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2002/88/EC & 2004/26/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2018 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2018, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2018, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

Data Center Power (DCP) : Complies with Uptime Institute: Tier III & IV. The manufacturer declares a load factor for grid failure of 100% per 24h and an average load factor per year less than 75%. No overload margin available. It can be operated for an unlimited number of hours per year. Applicable in countries with stable network. If the model is for DCC application, inform Factory.
G2 class load acceptance in accordance with ISO 8528-5:2013

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain
Tel:+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |
info@himoinsa.com | www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA



OPEN SKID



K38



WATER-COOLED



THREE PHASE



50 HZ



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.



Ctra. Murcia - San Javier, km. 23,6 | 30730 San Javier (Murcia) SPAIN | Tel.: +34 902 19 11 28 / +34 968 19 11 28
Fax: +34 968 19 12 17 | Export Fax +34 968 19 04 20 | E-mail: info@himoinsa.com | www.himoinsa.com





Engine Specifications | 1.500 r.p.m.

Rated Output (PRP) / DCP	kW	1450
Rated Output (ESP)	kW	1590
Manufacturer	MITSUBISHI	
Model	S16R PTA	
Engine Type	4-stroke diesel	
Injection Type	Direct	
Aspiration Type	Turbocharged and after-cooled	
Number of cylinders and arrangement	16-V	
Bore and Stroke	mm	170 x 180
Displacement	L	65,37
Cooling System	Water	
Lube Oil Specifications	API CD or CF SAE 30 or SAE 40	
Compression Ratio	14,0:1	

Fuel Consumption ESP	l/h	374,65
Fuel Consumption 100% PRP	l/h	341,66
Fuel Consumption 75 % PRP	l/h	259,68
Fuel Consumption 50 % PRP	l/h	183,44
Fuel Consumption 25 % PRP	l/h	107,77
Lube oil consumption with full load	g/kWh	0,8
Total oil capacity including tubes, filters	L	230
Total coolant capacity	L	368
Governor	Type	Electrical
Air Filter	Type	Dry
Inner diameter exhaust pipe	mm	340



- Oil temperature sensor
- Low coolant level sensor
- Exhaust gas compensator
- Diesel engine
- Water-cooled
- 4-stroke cycle
- 24V electrical system
- Standard air filter
- Standard fuel filter
- Standard oil filter
- Radiator with pusher fan
- HTW sender
- LOP sender
- Electronic governor
- Hot parts protection
- Moving parts protection



Generator Specifications | STAMFORD

Manufacturer	STAMFORD	
Poles	No.	4
Connection type (standard)	Star	
Mounting type	S-00 21"	
Insulation	Class	H class
Enclosure (according IEC-34-5)	IP23	

Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)



- Self-excited and self-regulated
- IP23 protection
- H class insulation





WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	5.283
Height (H)	mm	2.600
Width (W)	mm	2.043
Maximum shipping volume	m ³	28,06
Weight with liquids in radiator and sump	Kg	12840
Weight with liquids in sump	Kg	12266
Fuel tank capacity	L	450
Autonomy	Hours	2



APPLICATION DATA

EXHAUST SYSTEM

Maximum exhaust temperature	°C	530
Exhaust Gas Flow	m ³ /min	339
Maximum allowed back pressure	mm H ₂ O	600
Heat dissipated by exhaust pipe	KCal/Kwh	567,73

NECESSARY AMOUNT OF AIR

Intake air flow	m ³ /h	7680
Cooling Air Flow	m ³ /s	32,5
Alternator fan air flow	m ³ /s	2,69

STARTING SYSTEM

Starting power	kW	7,5 x 2
Starting power	CV	10,2 x 2
Recommended battery	Ah	400
Auxiliary Voltage	Vdc	24
Starter current peak	A	1250
Nominal starter current	A	400

FUEL SYSTEM

Fuel Oil Specifications	Diesel	
Maximum power suction pump	mm Hg	75
Maximum return feed pump	mm Hg	150
Fuel Tank	L	450



Open set version

- Steel chassis
- Emergency stop button
- Oil sump extraction kit
- Anti-vibration shock absorbers
- Chassis with integrated fuel tank
- Fuel level gauge
- Fuel tank drain plug
- Fuel transfer pump (Opcional).
- Steel industrial silencer -15db(A) attenuation (Opcional).
- Steel residential silencer -35db(A) attenuation. (Opcional).



FEATURES OF THE CONTROL UNITS

	CEM 7	CEA 7	CEC 7	CEM7 + CEC7
Generator Readings	Voltage between phases	•	•	•
	Voltage between neutral and phase	•	•	•
	Current intensities	•	•	•
	Frequency	•	•	•
	Apparent power (Kva)	•	•	•
	Active power (Kw)	•	•	•
	Reactive power (kVAr)	•	•	•
	Power factor	•	•	•
Mains Readings	Voltage between phases		•	•
	Voltage between phases and neutral		•	•
	Current intensities		•	•
	Frequency		•	•
	Apparent power		•	
	Active power		•	
	Reactive power		•	
Engine Readings	Coolant temperature	•		•
	Oil pressure	•	•	•
	Fuel level (%)	•	•	•
	Battery voltage	•	•	•
	R.P.M.	•	•	•
	Battery charge alternator voltage	•	•	•
Engine Protections	High water temperature	•	•	•
	High water temperature by sensor	•	•	•
	Low water temperature by sensor	•	•	•
	Low oil pressure	•	•	•
	Low oil pressure by sensor	•	•	•
	Low water level	•	•	•
	Unexpected shutdown	•	•	•
	Fuel storage	•	•	•
	Fuel storage by sensor	•	•	•
	Stop failure	•	•	•
	Battery voltage failure	•	•	•
	Battery charge alternator failure	•	•	•
	Overspeed	•	•	•
	Underspeed	•	•	•
Start failure	•	•	•	
Emergency stop	•	•	•	

• Standard

⊙ Optional



	CEM 7	CEA 7	CEC 7	CEM7 + CEC7	
Alternator Protections	High frequency	●	●	●	
	Low frequency	●	●	●	
	High voltage	●	●	●	
	Low voltage	●	●	●	
	Short-circuit	●	●	●	
	Asymmetry between phases	●	●	●	
	Incorrect phase sequence	●	●	●	
	Inverse power	●	●	●	
	Overload	●	●	●	
	Genset signal drop	●	●	●	
Counters	Total hour counter	●	●	●	
	Partial hour counter	●	●	●	
	Kilowatt meter	●	●	●	
	Starts valid counters	●	●	●	
	Starts failure counters	●	●	●	
Maintenance	●	●	●		
Communications	RS232	⓪	⓪	⓪	
	RS485	⓪	⓪	⓪	
	Modbus IP	⓪	⓪	⓪	
	Modbus	⓪	⓪	⓪	
	CCLAN	⓪	⓪	⓪	
	Software for PC	⓪	⓪	⓪	
	Analogue modem	⓪	⓪	⓪	
	GSM/GPRS modem	⓪	⓪	⓪	
	Remote screen	⓪	⓪	⓪	
	Tele signal	⓪ (8 + 4)	⓪ (8 + 4)	⓪ (8 + 4)	
J1939	⓪	⓪	⓪		
Features	Alarm history	●	●	●	
	External start	(10) / (opc. +100)	(10) / (opc. +100)	(10) / (opc. +100)	
	Start inhibition	●	●	●	
	Mains failure start	●	●	●	
	Start under normative EJP	●	●	●	
	Pre-heating engine control	●	●	●	
	Genset contactor activation	●	●	●	
	Mains & Genset contactor activation	●	●	●	
	Fuel transfer control	●	●	●	
	Engine temperature control	●	●	●	
	Manual override	●	●	●	
	Programmable alarms	●	●	●	
	Genset start function in test mode	●	●	●	
	Programmable outputs	●	●	●	
	Multilingual	●	●	●	
	Special Functions	GPS Positioning	⓪	⓪	⓪
		Synchronisation	⓪	⓪	⓪
Mains synchronization		⓪	⓪	⓪	
Second Zero elimination		⓪	⓪	⓪	
RAM7		⓪	⓪	⓪	
Remote screen		⓪	⓪	⓪	
Programming timer		⓪	⓪	⓪	

● Standard

⓪ Optional





CONTROL PANELS

M5

Digital manual Auto-Start control panel and thermal magnetic protection (depending on current and voltage) and differential with CEM7.
Digital control unit CEM7

AS5

Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM7 unit. (*) AS5 as optional with CEA7 unit. Automatic panel without transfer switch and WITH mains control.

CC2

Himoinsa Switching cabinet WITH display.
Digital control unit CEC7

AS5 + CC2

Automatic panel WITH transfer switch and with mains control. The display will be on the genset and on the cabinet.
Digital control unit CEM7+CEC7

AC5

Automatic mains failure control panel. Wall-mounted cabinet WITH transfer switch and thermal magnetic protection (depending on current and voltage).
Digital control unit CEA7



Electrical system

- Electric control and power panel with measurements devices and control unit (according to necessity and configuration)
- 4-pole thermal magnetic circuit breaker
- Connection panel wired to the safety protection (open thermal magnetic protection and alarm)
- Maintenance-free and anti-explosion battery
- Battery Switch
- Battery charger (standard on gensets with automatic control panels)
- Heating resistor (standard on sets with automatic control panels)
- Battery charger alternator with ground connection
- Starter battery/ies installed (cables and bracket included)
- Ground connection electrical installation with connection ready for ground spike (not supplied)

